

VIK-03 Fanvil Video Intercom Kit


Description

VIK-03 is a smart access solution designed for modern homes, featuring an all-new UI design and a style that better complements contemporary interior aesthetics. Paired with the i554, i60, and Fanvil Link App, it enables seamless communication with visitors anytime, anywhere—so you never miss a call and can always stay connected to your home security.

Main Features

- Plug-and-play, Quickly deployment.
- Flexible door access methods.
- Monitor door phone camera footage on both mobile and indoor station.
- Support one-touch calling and remote door opening anytime, anywhere.
- Provide 10 free App (Fanvil Link) accounts.



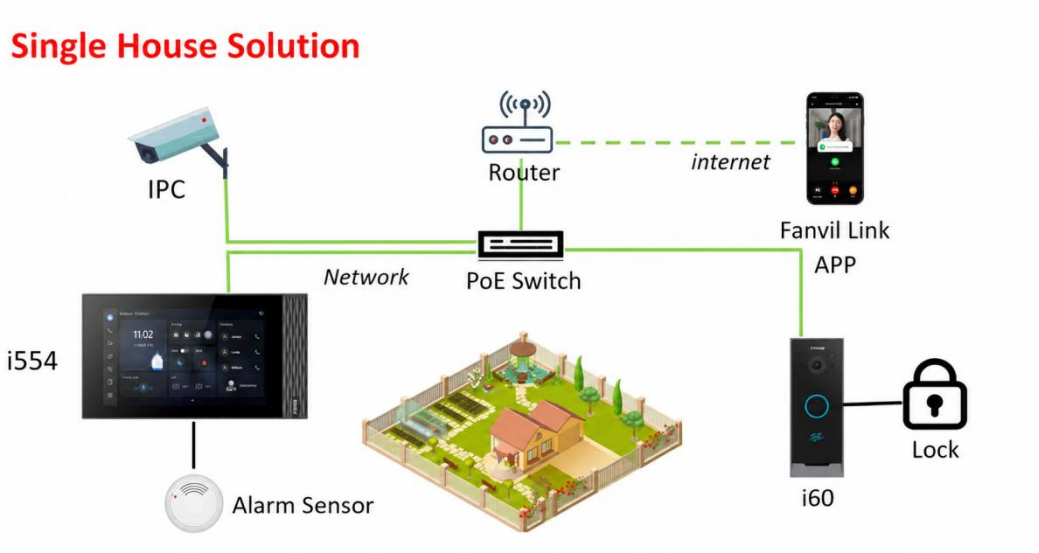

Fanvil Link Technology Co., Ltd.
Add: 13th Floor, Building 2, Runzhi R&D Center, Xin'an Street, Bao'an District, Shenzhen, China
Phone：0755-26402199 E-mail：sales@fanvil.com Web：www.fanvil.com

Fanvil i554 Specifications

Screen	7-inch color capacitive touch screen 1024×600
Body	ABS
Color	Gunmetal gray
Speaker	2W
Interface	8×Alarm input, 1×Short circuit output, 1×Doorbell input, 1×RS485(Reserved)
Network	10/100 Mbps adaptive
Power Supply	DC 12V / 1A PoE 802.3af
Power Consumption	PoE: 2.95~6.0 W; Power adapter: 2.49~5.1 W
Working Temperature	−10 °C to +50 °C (−14 °F to +122 °F)
Storage Temperature	−40 °C to +80 °C (−40 °F to +176 °F)
Working Humidity	10% to 90% RH
Size (LWH)	216.0 mm × 118.0 mm × 24.0 mm (8.50" × 4.65" × 0.94") (L × W × H)
Installation	Wall-mounted

Functional Capabilities

Supported Protocols	SIP 2.0 over UDP/TCP/TLS
Audio	Narrowband audio codec: G.711A/U, G.723.1, G.726-16/24/32/40, G.729AB, iLBC Broadband audio codec: G.722, OPUS Full-duplex hands-free calling, supports Acoustic Echo Cancellation (AEC)
Video	Hardware video decoding: H.264 Video call resolution: QVGA / CIF / VGA / 4CIF / 720P / 1080P
DTMF	In-band, out-of-band DTMF (RFC2833), SIP Info
Do Not Disturb (DND)	Supported, and the time can be user-defined
Additionally	One-touch family call; Customizable incoming call ringtones; Remote door unlocking; Send and receive messages

Fanvil Link Technology Co., Ltd.
Add: 13th Floor, Building 2, Runzhi R&D Center, Xin'an Street, Bao'an District, Shenzhen, China
Phone：0755-26402199 E-mail：sales@fanvil.com Web：www.fanvil.com

Fanvil i60 Specifications

Keyboard	1 Speed-dial Button
Body	ABS+PC
Colors	Panel: black, Housing: Gunmetal
Sensor	1/2.9-inch，CMOS
Camera	2 Mpx, Support infrared
Viewing Angle	140°(FOV) 100°(Horizontal) 57°(Vertical)
Output video	H.264 (Baseline, Main Profile)
Light Sensitivity	0.1Lux (Infrared/White light fill light)
Card Storage	1,0000
Power Consumption	PoE:1.63~6.93W Adapter: 1.51~6.16W
Power Supply	DC 12V / 1A PoE 802.3af Class 3
Working Temperature	−40 °C to +70 °C (−40 °F to +158 °F)
Storage temperature	−40 °C to +70 °C (−40 °F to +158 °F)
Size of the Panel (LWH)	50.0 mm × 30.0 mm × 130.0 mm (1.97" × 1.18" × 5.12") (L × W × H)
IP / IK Level	IP65
Installation	Wall-mounted Rain cover Flush-mounted(Need to Purchase Accessories Separately：EX101)

Functional Capabilities

Supported Protocols	SIP 2.0 over UDP/TCP/TLS
Lock Opening	IC Card，By DTMF Code，Remote Door Opening, BLE
Interface	Wiegand Input/Output Short Circuit Input/Output
Supported Wiegand Tyes	26, 34 bit
Supported ONVIF Types	Profile S
Supported Standards	DTMF, IC Card, Indoor Switch, BLE Cards 13.56 MHz
Talking Mode	Full duplex (High-definition Audio)
Additionally	Built-in relay，Motion detection，Tamper Alarm，TF Card，Open API

Fanvil Link Technology Co., Ltd.
Add: 13th Floor, Building 2, Runzhi R&D Center, Xin'an Street, Bao'an District, Shenzhen, China
Phone：0755-26402199 E-mail：sales@fanvil.com Web：www.fanvil.com