- 1. Press Phone Settings icon ♣ > Line > Select the line
- > Forward Settings
- 2. Enter the destination number and the type of forward and press OK icon √.

Call Mute

- 1. Press > to Mute the microphone during the call.
- 2. Press & again to un-mute the conversation.

Call list

- 1. Press Call Logs icon 🗲 .
- 2. Scroll the list using navigation key � or slide the screen 3. To dial an entry, press Dial icon •• or click the phone icon at left then click dial icon or pickup handset or press or 🕪).

Phonebook

- Access phonebook:

 1. Press Contact icon
- 2. Select All Contacts or other group.
- 3. To dial an entry, press Dial icon 📞 .

Add new entry:

- 1. Press Contact icon , Press All Contacts or other group > Press Add icon.
- 2. Enter name and number and press OK icon $\sqrt{\ }$.

Programmable keys

DSS virtual keys:

- 1. You can use the phone web interface to configure the keys of the screen.
- 2. Press unfold > you can press any keys which is still blank or long press the key that have configured, select a type and value, press √icon.

Other keys:

You can also configure shortcuts for the navigation keys and softkeys on web ui.

2. You can press Phone setting icon 🗘 > Key, select the SoftkeyScreen you need, then select among the configurable items, and select your desired type and value, press Save.

Redial

1. Press 🔾 , redial a call number.

Do not disturb

- 1. Press DND icon a when standby or click Phone Settings icon 🌣 > DND.
- 2. Select the Mode.

Voice message

- 1. To access your voice mailbox, press Voice message key or Voice message icon \mathbf{QQ} , number of message be indicated if provided by your server or PBX.
- 2. Select the line and press phone icon to call.


Bluetooth

- 1. Press Bluetooth icon in the status bar to open Bluetooth.
- 2. Press Settings icon 4 > Connected devices > Pair new device . After opening, it displays the scanned Bluetooth list, select any device, and click on the device pairing.

Wi-Fi

- 1. Enter the Settings icon <a> Network & internet > Wi-Fi, enable Wi-Fi, and you can browse the list of available Wi-Fi;
- 2. Select the available network, click on the network to enter the password to connect and click connect button.



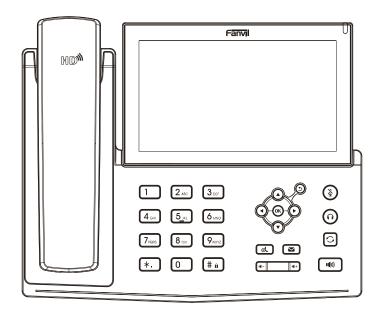

X7A **Quick Installation Guide**


Fanvil Technology Co., LTD. www.fanvil.com

www.fanvil.com

Email:sales@fanvil.com Tel:0755-2640-2199

Add: 4F, Block A, Building 1#, GaoXinQi Hi-Tech Park (Phase-II),67th District, Bao'An, Shenzhen, China

Packaging list

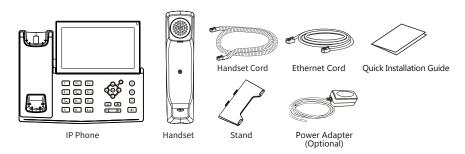

Screen icon



In handset mode

Mute activated















New VM Messages

Missed call(Status bar)











Keys features

Ringer off



Message waiting indicator



Up/down/left/right navigation keys, Return key OK key, Shortcut to Menu Return key, Go back to the previous directory

(d) Hold key, Hold/Resume the call

In idle mode: ringer off In communication mode: mute/un-mute a call



In idle mode or during ringing: increase or decrease ringer volume In communication: increase or decrease earpiece, headset or hands-free volume



Voice message key



Headset kev. Activate/deactivate Headset



Redial key, Access to redial the last record




Long press to lock keypad. Enter PIN to unlock keypad (default 123)



Hands-free key, Activate/deactivate hands free


Installation the device



Connecting to the Device

Please connect power adapter, network, PC, handset, and headset to the corresponding ports as described in below picture.

- ① USB port: connect USB device (U disk)
- 2 Power port; connect the power adapter.
- 3 Network port: connecting local area network or internet.
- 4 PC port: the network port connect to the computer.
- (5) Headset port: connect headset.
- 6 Handset port: connect IP Phone handset.



Configuration

Configuration via Phone

- 1. Press Phone Settings icon 💢 .
- 2. Select Ethernet Settings: To configure the Network Settings (DHCP/Static)
- 3. Select Line: To configure enable the account, fill the SIP server address, port, user name, password etc.

Configuration via Web

- 1. Get the IP address from the phone: Press Phone Settings icon 🌣 > Common.
- 2. Login: Input the IP address in the web browser. The PC and phone should be in the same IP address segment (The default username and password are both 'admin'.)
- 3. Configure: Select network/Account, etc. And fill the relevant content.

Language setting

- 1. Press Settings icon ◀ > System > Language & Input
- 2. Select the desired language.

Making a call

- 1. Pre-dialing: enter the phone number and pick up the
- 2. Direct dialing: lift the handset and enter the phone
- 3. Handsfree: enter phone number and press (1) or vice
- 4. **Headset:** enter phone number and press Ω or vice versa.
- 5. Dial icon: Click dial icon and then enter the phone
- 6. Designated line: press line key, enter phone number and press dial kev.

Accepting a call

- 1. With the handset: pick up the handset.
- 2. With a headset: press \(\Omega\).
- 3. With the handsfree: press iti).

Putting a call on hold

- 1. Press key or Hold icon, caller is put on hold.
- 2. To retrieve the call press (key or Resume icon. Note: with more than one active call, select desired call by sliding screen and use the corresponding icon to hold or resume

3-party conference

- 1. Once in line with 1st caller, press 🖒 Conference icon, 1st caller is put on hold.
- 2. Then call the 2nd number.
- 3. After, 2nd call is established, press Conference icon to set up the conference.

Call transfer

Attended transfer:

- 1. Press & Xfer icon during the active conversation, the call is put on hold.
- 2. Dial the second telephone number.
- 3. When the call is answered, then press c. Xfer icon to complete the operation.

Blind transfer:

- 1. Press CX Xfer icon during the active conversation, the call will be on hold.
- 2. Then enter the 2nd telephone number and press & Xfer